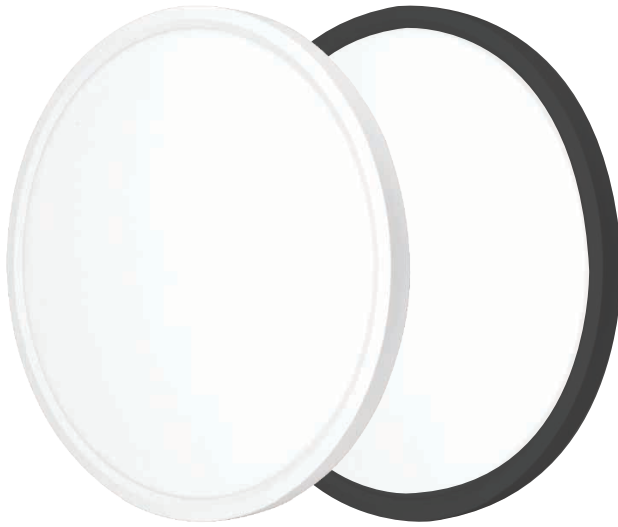


Product Specification Sheet

2400-3CCT


HIGHLIGHTS

16" Adjustable 3 CCT Surface Mount / Semi-flush Mount

- 80 lmn per wattage high efficiency
- Good quality LGP (Light Guide Plate) and diffuser plate
- Provides uniform lighting with no black dots or shadow



CERTIFICATIONS



COLOUR TEMPERATURE

3000K / 4000K / 5000K (Selectable)




SPECIFICATIONS

MODEL	2400-3CCT
Wattage	30W
Voltage	120V AC, 60Hz
Lumens	2700 lmn
Beam Angle	120°
Lifetime	50,000 hours
Dimmable	Yes
Grade Of Protection	IP20
CRI	80
Diffuser/Lens Material	PS
Rating	Non-IC rated/Damp location/ Indoor use
Operating Temperature	-20°C ~ +40°C
Application	Corridors / Lobbies / Kitchens / Balconies / Bathrooms / Bedrooms

**FLAT-OUT
FABULOUS
CEILING
PERFECTION**

5 YEAR WARRANTY

DIMENSIONS



2400-3CCT
 A - 15-5/8" (397mm)
 B - 14-5/16" (364mm)
 C - 15-16" (24mm)


FlashDash Electrical reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

Product Specification Sheet

2400-3CCT




TESTING REPORT

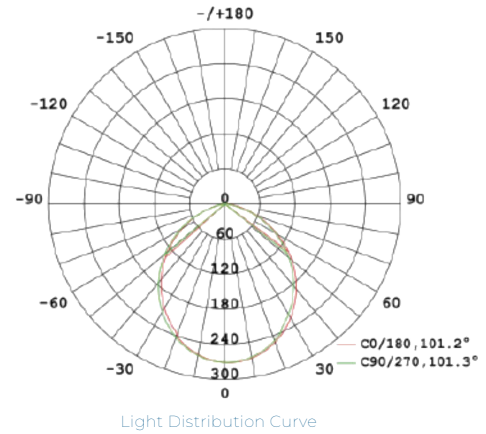

AVAILABLE COLOURS



WHITE
(WH)



BLACK
(BK)

REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted By:
			Date:

FlashDash Electrical reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.