

## Product Specification Sheet

### FLUSH MOUNTS


3109-3CCT | 3112-3CCT | 3116-3CCT



#### HIGHLIGHTS

#### 9", 12" And 16" LED Frameless Flush Mount With Good Quality Diffuser Plate, And Selectable CCT

- Rotatable and extremely easy installation
- Good quality LGP (Light Guided Plate) and diffuser plate
- Stable design for whole structure ensures uniform lighting, no black dots or shadow



#### CERTIFICATIONS



#### COLOUR TEMPERATURE

3000K / 4000K / 5000K (Selectable)




#### SPECIFICATIONS

| MODEL                  | 3109-3CCT                                 | 3112-3CCT                                 | 3116-3CCT                                 |
|------------------------|-------------------------------------------|-------------------------------------------|-------------------------------------------|
| Wattage                | 20W                                       | 25W                                       | 30W                                       |
| Voltage                | 120V AC, 60Hz                             | 120V AC, 60Hz                             | 120V AC, 60Hz                             |
| Lumens                 | 1600 lmn                                  | 2000 lmn                                  | 2400 lmn                                  |
| Beam Angle             | 120°                                      | 120°                                      | 120°                                      |
| Lifetime               | 50,000 hours                              | 50,000 hours                              | 50,000 hours                              |
| Dimmable               | Yes                                       | Yes                                       | Yes                                       |
| Grade Of Protection    | IP20                                      | IP20                                      | IP20                                      |
| CRI                    | 80                                        | 80                                        | 80                                        |
| Diffuser/Lens Material | PC                                        | PC                                        | PC                                        |
| Rating                 | Non-IC rated/Damp location/<br>Indoor use | Non-IC rated/Damp location/<br>Indoor use | Non-IC rated/Damp location/<br>Indoor use |
| Operating Temperature  | -20°C ~ +40°C                             | -20°C ~ +40°C                             | -20°C ~ +40°C                             |
| Size                   | Ø8-7/8"                                   | Ø11-1/2"                                  | Ø15-5/8"                                  |

**FLAT-OUT  
FABULOUS  
CEILING  
PERFECTION**

**5 YEAR WARRANTY**

#### AVAILABLE COLOURS




#### 3109-3CCT

A - Ø8-7/8" (225mm)  
B - 1-1/2" (38mm)

#### 3112-3CCT

A - Ø11-1/2" (293mm)  
B - 1-1/2" (38mm)



#### 3116-3CCT

A - Ø15-5/8" (397mm)  
B - 1-1/2" (38mm)


FlashDash Electrical reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

## CLOSET LIGHTS

3109-3CCT | 3112-3CCT | 3116-3CCT



### TESTING REPORT

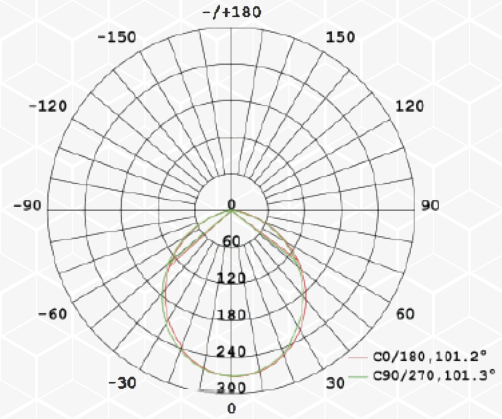

| REFERENCE | QUANTITY | REMARKS | PROJECT DETAILS |
|-----------|----------|---------|-----------------|
|           |          |         | Project:        |
|           |          |         | Location:       |
|           |          |         | Architect:      |
|           |          |         | Engineer:       |
|           |          |         | Contractor:     |
|           |          |         | Submitted By:   |
|           |          |         | Date:           |

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

