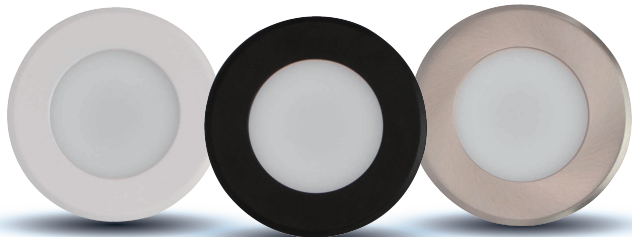


Product Specification Sheet

PUK LIGHTS
PUK 1.5-3CCT | PUK 3.0-3CCT


HIGHLIGHTS

Mini LED Puk Downlight For Indoor Use With 90+ CRI And Selectable CCT

- Perfect for illuminating areas such as cabinet, closet, shelf, corridor or even a wine bar
- Material: aluminum + PMMA
- Can be installed wherever light is needed and easily connected in daisy-chain to provide uniform illumination
- Easy installation: recessed mount
- Suitable for indoor use only, dry and damp locations



CERTIFICATIONS



COLOUR TEMPERATURE

3000K / 4000K / 5000K (Selectable)

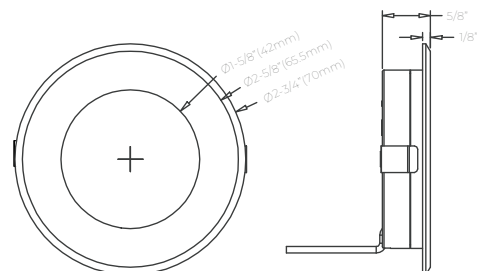

SPECIFICATIONS

MODEL	PUK 1.5-3CCT	PUK 3.0-3CCT
Wattage	1.5W	3W
Voltage	12V DC	12V DC
Lumens	120 lmn	240 lmn
Beam Angle	120°	120°
Lifetime	50,000 hours	50,000 hours
Dimmable	Yes (if with dimmable driver)	Yes (if with dimmable driver)
CRI	90+	90+
Rating	IC rated/Indoor use/ Dry & Damp Location	IC rated/Indoor use/ Dry & Damp Location
Grade of Protection	IP52	IP54
Cutout	Ø2-3/8" (60mm)	Ø2-3/8" (60mm)
Operating Temperature	-10°C ~ +40°C	-10°C ~ +40°C
Case Quantities	100	100

**GREAT THINGS
COME IN
SMALL
PACKAGES**

5 YEAR WARRANTY

DIMENSIONS



FlashDash Electrical reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

Product Specification Sheet

PUK LIGHTS
PUK 1.5-3CCT | PUK 3.0-3CCT

CUT HOLE SIZE



AVAILABLE FINISHES



White



Black



Satin Nickel

ACCESSORIES (SOLD SEPARATELY)

PUK-EXT
 Extension Cord

PUK 02I-SM
 Surface Mounting Kit



REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted By:
			Date:

FlashDash Electrical reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.