

Product Specification Sheet

1" SLIM LIGHTS SLIM-RG1-5CCT



HIGHLIGHTS

1" Regress Module Changeable Trim With Selectable CCT

- Interchangeable Trims
- Type IC, Air-Tight - No Housing Required
- Fast Installation & No Junction Box Needed
- Includes two spring loaded clips to attached to any ceiling material
- 100%-10% dimming capability. Compatible with industry standard forward-phase / reverse-phase and Triac/ELV Dimmers
- Includes **free white trim** in standard packagin



CERTIFICATIONS



COLOUR TEMPERATURE

2700K / 3000K / 3500K / 4000K / 5000K (Selectable)




SPECIFICATIONS

MODEL	SLIM-RG1-5CCT
Wattage	7W
Voltage	120V AC, 60Hz
Lumens	500 lmn
Beam Angle	38°
Lifetime	50,000 hours
Dimmable	Yes (TRIAC dimming)
CRI	90Ra+
Rating	IC rated/Indoor use/ Damp Location
Grade of Protection	IP54
Cutout	Ø2-1/8" (54mm)
Operating Temperature	-20°C ~ +40°C

**ELEVATE
YOUR
LIGHTING
GAME**

5 YEAR WARRANTY

DIMENSIONS

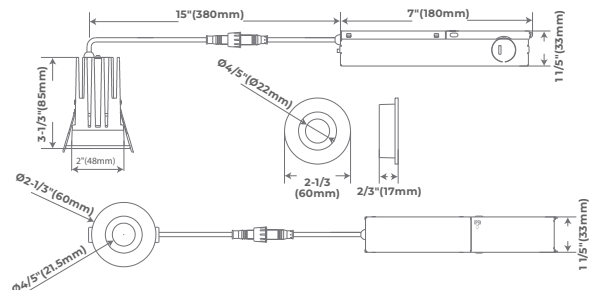


FlashDash Electrical reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

Product Specification Sheet



1" SLIM LIGHTS
SLIM-RG1-5CCT

CUT HOLE SIZE

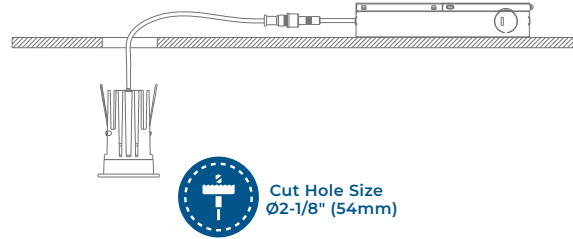


INCLUDED IN BOX

- 1" Regress Module Downlight with Remote Driver




PRODUCT BREAKDOWN

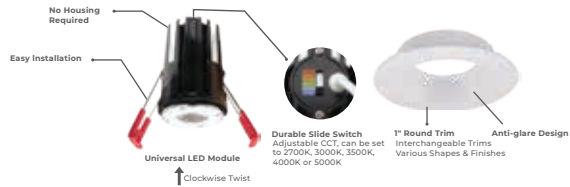

TRIM OPTIONS



ACCESSORIES (SOLD SEPARATELY)



REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted By:
			Date:

FlashDash Electrical reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.