


LED Slim Lights

MODEL SLIM4FR-5CCT

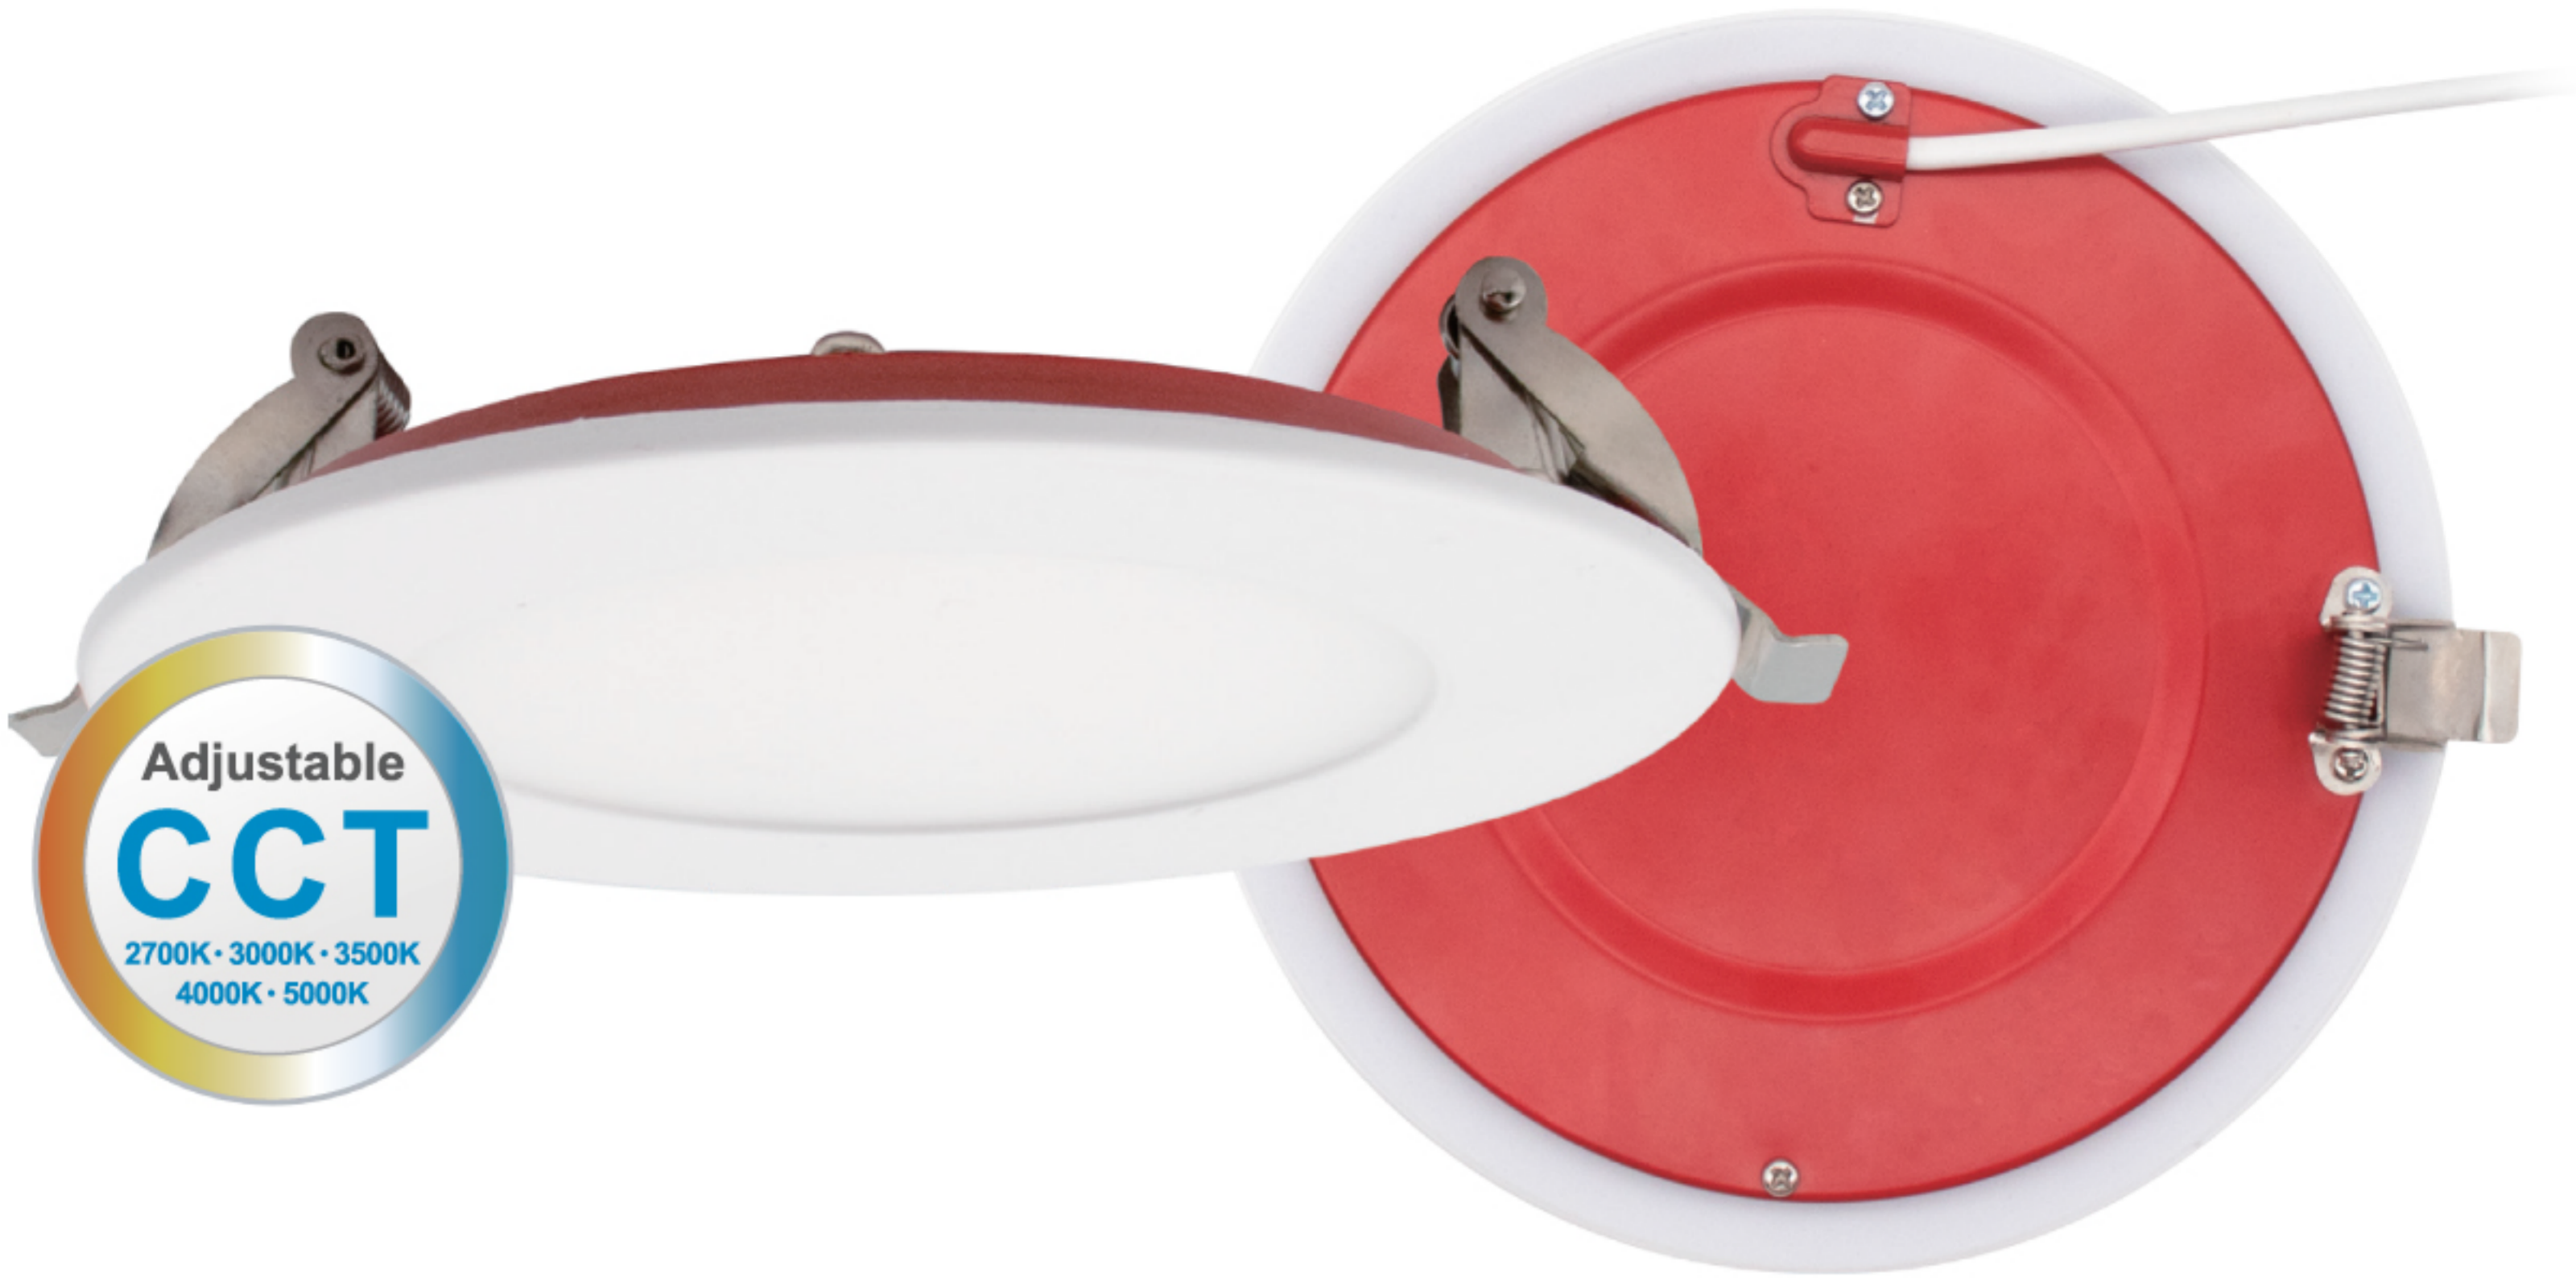


HIGHLIGHTS

- Reinforced and heat resistant steel casting providing 2-hour fire rating | FT6 cable (plenum rated)
 - 4" LED Fire Rated Recessed Downlight - with Adjustable CCT
 - Residential / Commercial grade driver included
- Tested & Certified to comply with UL 263-2011(R2022) & ASTM E119-20 & CAN/ULC-S101-14
 - Rated for ceiling assemblies with up to 2 layers of drywall, each 5/8 inch, for a total of 1-1/4 inches

SPECIFICATIONS

Model	SLIM4FR-5CCT
Wattage	12W
Voltage	120V AC
Dimmable	Yes
Light Output	800 lmn
Power Factor	>0.9
Application	Recessed ceiling / Balcony / Overhanging eaves
CRI Warranty	80Ra 5 Years
Location	Wet Location
Grade Of Protection	IP54
Beam Angle	120°
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Operating Temp.	-20°C~40°C
Case Quantities	18

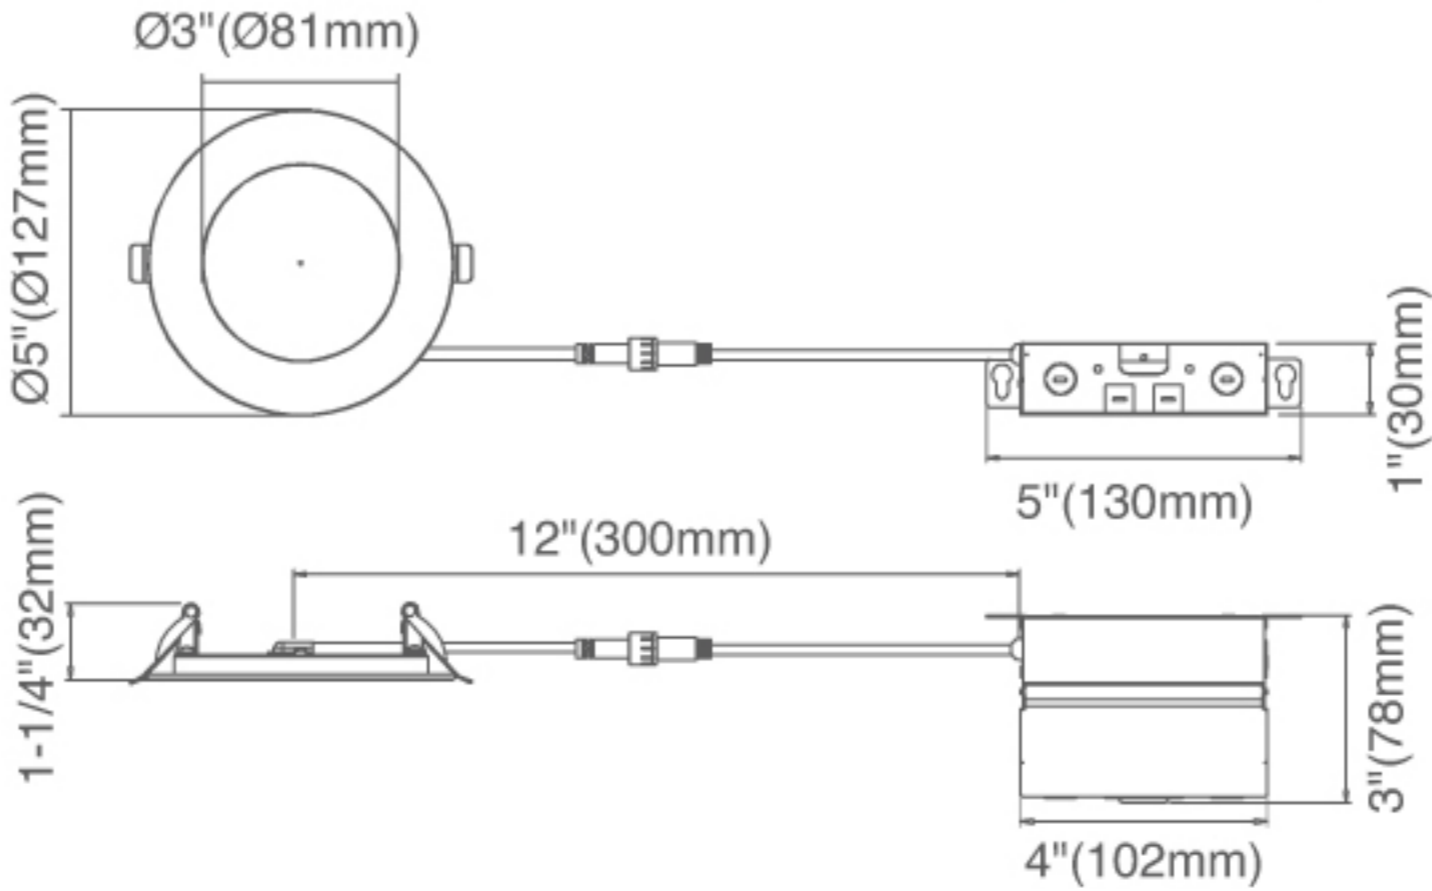


FlashDash Electrical reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

LED Slim Lights

MODEL SLIM4FR-5CCT

INSTALLATION

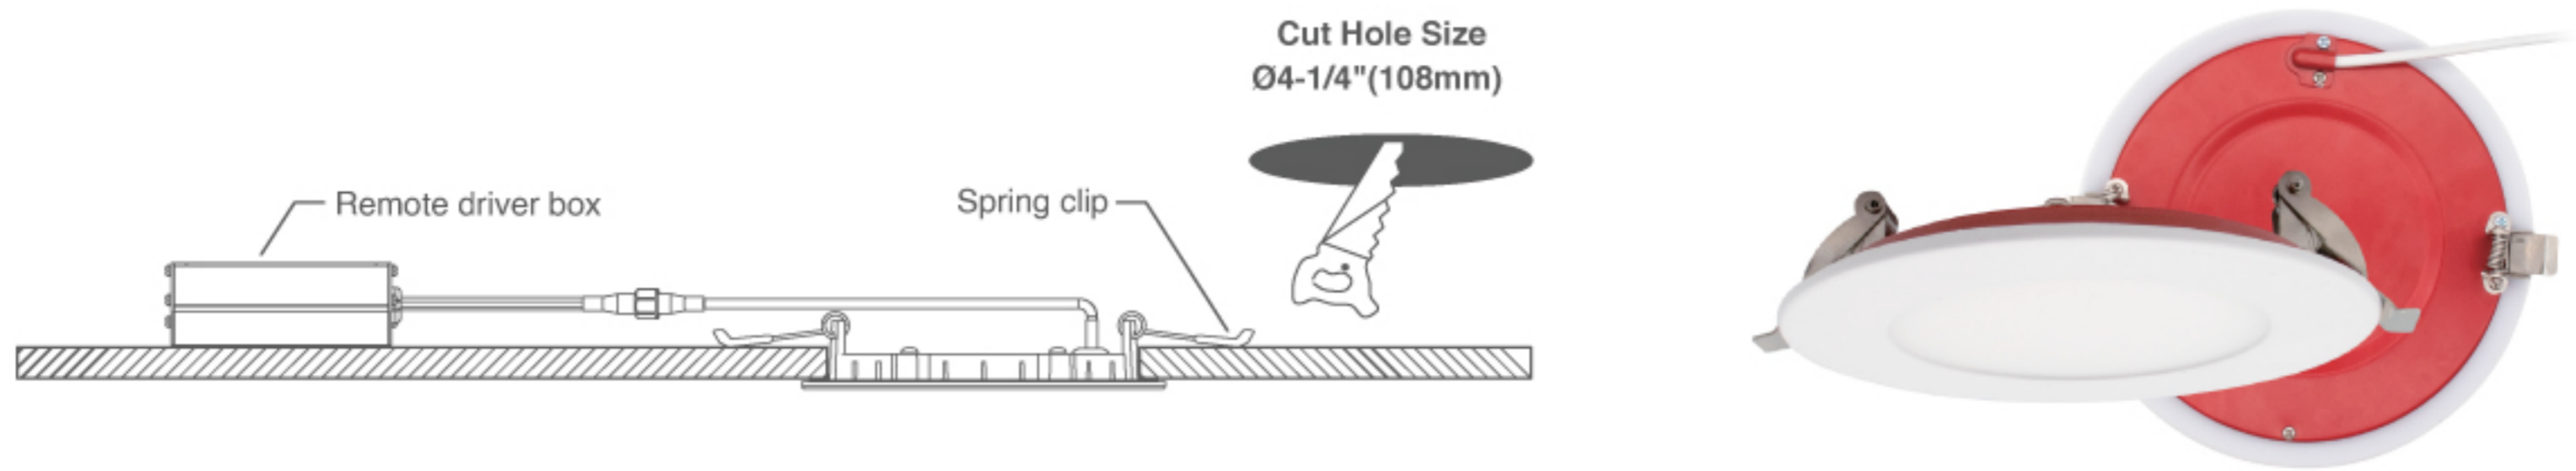

ACCESSORIES (SOLD SEPERATELY)

DECORATIVE TRIMS



SLIM4-RING BK
(Black Ring)



SLIM4-RING SN
(Satin Nickel Ring)

MOUNTING PLATES



PLATE 26-4A

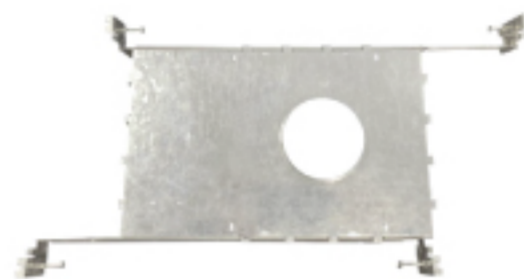


PLATE 4A-HB

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

FlashDash Electrical reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.